

Intuitive handling
for secure data.



Discover our software now
at www.testo.com!



Practical and useful accessories.

Optimize your workflow with Testo's sophisticated and practical accessories – for easy and safe handling in every application.

Accessories	Order no.
Lithium battery CR2032 button cell for reordering (please order 2 batteries per data logger)	0515 5174
ComSoft Basic Basic software for programming and reading out Testo data loggers including display of measured values in graph and chart form as well as export function (Free download available after registration)	0572 0580
ComSoft Professional Professional software for programming and reading out Testo data loggers and for data archiving with evaluation and display options that go beyond the basic functions	0554 1704
ISO calibration certificate temperature Calibration points: -18 °C, 0°C, +40 °C (per channel/ instrument)	0520 0153
ISO calibration certificate for humidity Calibration points: 11.3 %, 75.3 % relative humidity at +25 °C	0520 0076

Information and further accessories at www.testo.com



Discover more products
from the smart
networked HVAC/R
world of Testo now.

Be sure. **testo**



Precise
measurement
and seamless
documentation.



Simply maximum efficiency.
Simply more security.

Efficient commissioning, testing and maintenance
of all HVAC/R systems: the testo 174 mini data loggers

Download the testo Smart App
now and use all the benefits!



www.testo.com

Simply perfectly adjusted HVAC/R systems for maximum efficiency and stability.



The intelligent testo 174 mini data loggers with Bluetooth® make the commissioning, testing and maintenance of HVAC/R systems safer, more efficient and more convenient than ever before. For easy integration into your everyday working life and optimum results.

The simple connection to the testo Smart App enables easy integration into your workflow.



With seamless measurement data acquisition and documentation, the testo 174 H BT and testo 174 T BT ensure maximum safety and simplified processes – thanks to Bluetooth and seamless app connection.

- Precise indoor measurement in the temperature measuring range from -20 °C to +70 °C (testo 174 H BT) or from -30 °C to +70 °C (testo 174 T BT)
- Simple data evaluation via Bluetooth directly at the measurement site up to a distance of 30 meters
- Reliable automatic data backup when the battery is empty or when changing the battery
- Seamless connection to the free testo Smart App including export function and report generation in PDF format

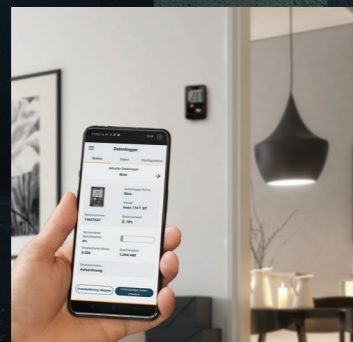

- ✓ Simple and intuitive configuration and analysis of measurement data via mobile device with the testo Smart App
- ✓ More efficient processes and noticeable time savings by leaving the data logger at the measuring location
- ✓ Fast recording as well as error-free and seamless digital documentation of all measurement results

- ✓ Time-saving and intuitive data acquisition and readout via USB-C without a separate readout station
- ✓ Seamless continued use of the proven readout procedures and the established PC software
- ✓ Uncomplicated option for combining previous and new USB device versions

testo 174 H BT
Mini data logger for temperature and humidity with Bluetooth and app connection

Order no. 0572 1743 02



testo 174 H
Mini data logger for temperature and humidity with USB-C and PC Software

Order no. 0572 1741 02



testo 174 T BT
Mini temperature data logger with Bluetooth and app connection

Order no. 0572 1742 02



testo 174 T
Mini temperature data logger with USB-C and PC software

Order no. 0572 1740 02



Optimally adjusted systems thanks to reliable monitoring.

Simple testing and maintenance of HVAC/R systems

Use the new testo 174 mini data loggers to check whether the desired temperature values are being reached and also easily monitor the humidity.

Safe commissioning of HVAC/R systems

Monitor whether the newly installed HVAC/R system complies with the set values and operates evenly.

Convenient fault diagnosis

Record temperature and air humidity data to diagnose potential problems with your HVAC/R system and easily locate faults such as excessive temperatures, condensation problems or insufficient air exchange.

Smart monitoring of the indoor climate

Easily assess the air quality in a building. This allows you to easily make adjustments to the HVAC/R systems and ensure optimum air quality.

The testo 174 H and 174 T models reliably monitor and analyze air humidity and temperature parameters - with guaranteed data security - and via the free ComSoft Basic software, provide:

- Professional software with Excel export function for programming the logger, analyzing data and creating reports in PDF format
- Large temperature measuring range from -20 °C to +70 °C (testo 174 H) or from -30 °C to +70 °C (testo 174 T) for precise measurement indoors
- Reliable automatic data backup when the battery is empty or when changing the battery
- Convenient measurement data storage for up to 16,000 measured values

