


Counting scale KERN CFS

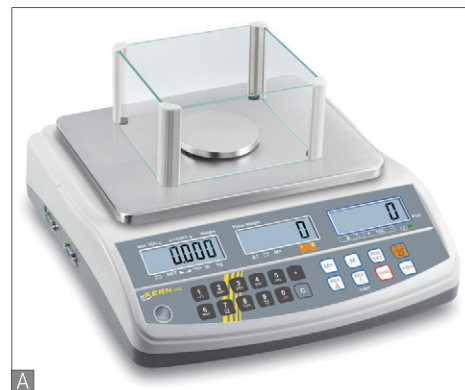

Professional, high resolution counting scale with 100 item memories and second balance interface, counting resolution 75,000 points

Features

- **Memory (PLU) for 100 items** with additional text, reference weight and tare weight, e.g. of a container
- **Weighing with tolerance range** (checkweighing), ideal for portion division, dispensing, grading, only in weighing and counting mode
- **Programmable using numerical key pad:**
 - required reference quantity
 - known reference weight
- **Fill-to-target function:** Programmable target quantity or target weight. An acoustic and visual signal will be displayed when the target value is reached
- **Precise counting:** The automatic optimisation of reference weight gradually improves the average value of the piece weight

- **Interface for second balance** to construct a high-resolution counting system, e.g. with weighing bridges KFP V20 (see page 121)

Technical data

- Large backlit LCD displays, digit height 20 mm
- Dimensions of weighing plate
 - A** Ø 80 mm
 - B** WxD 294x225 mm, see larger picture
 - C** WxD 370x240 mm
- Overall dimensions WxDxH
 - A, B** 320x350x125 mm (without draft shield)
 - C** 370x360x125 mm
- Permissible ambient temperature 0 °C / 40 °C

Accessories

- **Protective working cover** over keyboard and housing standard, can be reordered, only for models with weighing plate sizes **B**, KERN CFS-A02
- **Rechargeable battery pack internal**, operating time up to 70 h without backlight, charging time approx. 14 h, can be reordered, only for models with weighing plate sizes **B**, KERN GAB-A04
- **Signal lamp** for visual support of weighing with tolerance range, WxDxH 100x180x300 mm, KERN CFS-A03
- **Y cable** for parallel connection of two terminal devices to the RS-232 interface on the balance, e.g. signal lamp and printer, KERN CFS-A04
- **Suitable printers** see page 138

STANDARD






































OPTION



Model	Weighing range [Max] kg	Readout [d] g	Reproducibility g	Min. piece weight [Counting] g/piece	Net weight approx. kg	Weighing plate	Option	
							DKD Calibr. Certificate	
KERN							DKD KERN	
CFS 300-3	0,3	0,001	0,002	0,005	2,5	A	963-127	
CFS 3K-5	3	0,01	0,02	0,05	3,8	B	963-127	
CFS 6K0.1	6	0,1	0,1	0,1	3,8	B	963-128	
CFS 15K0.2	15	0,2	0,2	0,2	3,9	B	963-128	
CFS 30K0.5	30	0,5	0,5	0,5	3,8	B	963-128	
CFS 50K-3	50	1	1	1	5,5	C	963-128	

New model

KERN Pictograms

 Internal adjusting (CAL): Quick setting of the balance's accuracy with internal adjusting weight (motordriven).	 Recipe level A: Separate memory for the weight of the tare container and the recipe ingredients (net total).	 Rechargeable battery pack: rechargeable set.
 Adjusting program (CAL): For quick setting of the balance's accuracy. External adjusting weight required.	 Recipe level B: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through displays.	 Mains adapter: 230V/50Hz in standard version for Germany. On request GB, AUS or USA version.
 Memory: Balance contains memories, e.g. for item data, weighing data, tare weights etc. PLU.	 Recipe level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through displays. Additional convenient functions, such as barcode and back calculation functions.	 Power supply: integrated in balance. 230V/50Hz in Germany. More standards e. g. GB, AUS, USA on request.
 Data interface RS-232: To connect the balance to a printer, PC or network.		 Strain gauges: Electrical resistor on an elastic deforming body.
 RS 485 data interface: To connect the balance to a printer, PC or other peripheral devices. High tolerance against electromagnetic disturbance.	 Percentage determination: Determining the deviation in % from the target value (100%).	 Tuning fork principle: A resonating body is electromagnetically excited, causing it to oscillate.
 USB data interface: To connect the balance to a printer, PC or other peripheral devices.	 Weighing units: Can be switched to e. g. non-metric units at the touch of a key. See balance model. Please refer to KERN's website for more details.	 Electromagnetic force compensation: Coil in a permanent magnet. For the most accurate weighings.
 Bluetooth data interface: To transfer data from the balance to a printer, PC or other peripheral devices.	 Weighing with tolerance range: Upper and lower limiting can be programmed individually, e.g. dosing/sorting and portioning.	 Single cell technology: Advanced version of the force compensation principle with the highest level of precision.
 Control outputs (optocoupler, digital I/O): to connect relays, signal lamps, valves, etc.	 Vibration-free weighing: (Animal weighing program) Vibrations are filtered out so that a stable weight is obtained.	 Verification possible: The time required for verification is specified in the pictogram.
 Interface for second balance: for direct connection of a second balance.	 Spray and dust protection IPxx: The type of protection is shown by the pictogram. For details see the glossary.	 DKD calibration possible: The time required for DKD calibration is shown in days in the pictogram.
 Network interface: For connecting the scale to an Ethernet network. With KERN products you can also use a universal RS-232/LAN converter.	 Stainless steel: the balance is protected against corrosion.	 Package shipment: The time required to manufacture the product internally is shown in days in the pictogram.
 GLP/ISO record keeping: of weighing data with date, time and identification-no. Only with printers from KERN.	 Suspended weighing: load support with hook on the underside of the balance.	 Pallet shipment: The time required to manufacture the product internally is shown in days in the pictogram.
 Piece counting: Reference quantities selectable. Display can be switched from piece to weight.	 Battery operation: Ready for battery operation. The battery type is specified for each device.	 Warranty: The warranty period is shown in the pictogram.

Precision is our business

To ensure the high precision of your balance KERN offers you the the appropriate test weight package for your balance, consisting of the test weight, box and DKD certificate, as proof of its accuracy ... the best pre-requisite for proper balance calibration.

In the extensive KERN test weight range, you will find test weights in the international OIML error limit classes: E1, E2, F1, F2, M1, M2, M3 with weights from 1 mg - 2000 kg.

The KERN DKD calibration laboratory for electronic balances and weights has been accredited by DKD since 1994 and today is one of the most modern and best-equipped DKD calibration laboratories for balances, test weights and force-measurement in Europe.

(DKD = German Calibration Service)

Thanks to the high level of automation, we can carry out DKD calibration of balances, test weights and force-measuring devices 24 hours a day, 7 days a week.

Range of services:

- DKD calibration of balances with a maximum load of up to 6 t
- DKD calibration of weights in the range of 1 mg – 500 kg
- Database supported management of checking equipment and reminder service
- Calibration of force-measuring devices
- DKD calibration certificates in the following languages
D, GB, F, I, E, NL, PL

Do you have questions about your scale, the corresponding test weight or the calibration service? Your KERN specialist dealer will be pleased to assist you.

Your KERN specialist dealer: