










Hand Held Temperature Probes

type K thermocouple










		order code	£ each
penetration probe  Ø3.3 x 130 mm	This stainless steel penetration probe is strong, versatile and ideal for measuring a wide variety of applications including liquids and semi-solids. Response time less than three seconds. Probe temperature range -75 to 250 °C.	123-160	27.50
		323-160 <i>(coiled lead)</i>	28.50
penetration probe  Ø3.3 x 300 mm	This extended, stainless steel penetration probe is versatile and ideal for measuring a wide variety of applications including liquids and semi-solids. Response time less than three seconds. Probe temperature range -75 to 250 °C.	123-168	32.50
		323-168 <i>(coiled lead)</i>	33.50
fast response probe  Ø3.3 x 100 mm	This reduced tip, fast response, stainless steel penetration probe is ideal for liquids or semi-solids i.e. soft rubber and other similar materials. Response time less than two seconds. Probe temperature range -75 to 250 °C.	123-159	30.50
		323-159 <i>(coiled lead)</i>	31.50
needle penetration probe  Ø1.8 x 130 mm	This fast response, stainless steel, needle penetration probe is suitable for liquids and semi-solids including soft rubber/plastic etc. Response time less than two seconds. Probe temperature range -75 to 250 °C.	123-100	29.50
		323-100 <i>(coiled lead)</i>	30.50
oven probe  Ø3.3 x 130 mm	This oven probe has a stainless steel handle and a two metre PTFE high temperature lead. Response time less than four seconds. Probe temperature range -75 to 250 °C	133-170	43.50
oven probe - no handle  Ø3.3 x 130 mm	Ideal for continuous temperature monitoring this oven probe is without a handle, and incorporates a two metre PTFE high temperature lead. Response time less than four seconds. Probe temperature range -75 to 250 °C	133-173	20.50
rigid between pack probe  Ø4.5 x 130 mm	This rigid, stainless steel between pack probe is strong and versatile, designed specifically to measure between packets or boxes of produce. Response time less than three seconds. Probe temperature range -75 to 250 °C.	123-060	30.50
		323-060 <i>(coiled lead)</i>	31.50
high temperature probe  Ø1.5 x 130 mm	This flexible, MI probe can be bent to any shape without affecting its performance. Ideal for measuring high temperatures, i.e. fryers/ furnaces. Response time less than two seconds. Probe temperature range -200 to 1100 °C.	123-204	30.50
		323-204 <i>(coiled lead)</i>	31.50
high temperature probe  Ø3 x 130 mm	This flexible, MI probe can be bent to any shape without affecting its performance. Ideal for measuring high temperatures, i.e. fryers/furnaces. Response time less than two seconds. Probe temperature range -200 to 1100 °C.	123-212	30.50
		323-212 <i>(coiled lead)</i>	31.50

Please note: for hand held type T thermocouple probes, replace the third digit (3) of the order code with the number 7



Hand Held Temperature Probes


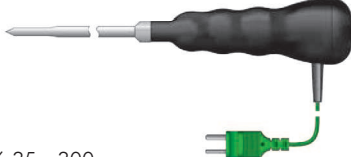
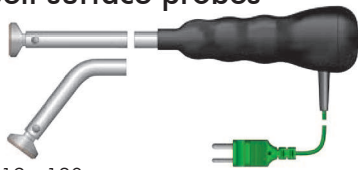
type K thermocouple

		order code	£ each
Binder probe  Ø3 x 130 mm	This rounded tip, stainless steel probe is designed for inserting into Binder self-sealing glands to measure the temperature of vessels or radiators. Response time less than three seconds. Probe temperature range -75 to 250 °C.	123-240	28.50
		323-240 <i>(coiled lead)</i>	29.50
air or gas probe  Ø4.5 x 130 mm	This stainless steel, fast response air/gas probe is ideal for measuring air temperature in chill cabinets, fridges, freezers, offices, storage areas and similar. Response time less than 0.5 of a second. Probe temperature range -75 to 250 °C.	123-300	27.50
		323-300 <i>(coiled lead)</i>	28.50
ribbon surface probe  Ø15 x 130 mm	This precision, ribbon surface probe utilises flat ribbon technology that ensures a fast, accurate response with minimal heat loss. Response time less than 0.5 of a second. Probe temperature range -75 to 250 °C. A right-angled version is also available.	123-030	38.00
		123-032 <i>(right-angled)</i>	42.50
ribbon surface probe  Ø8 x 130 mm	This precision, ribbon surface probe utilises flat ribbon technology that ensures a fast, accurate response with minimal heat loss. Response time less than 0.5 of a second. Probe temperature range -75 to 250 °C. A right-angled version is also available.	123-044	29.50
		123-052 <i>(right-angled)</i>	32.00
waterproof surface probe  Ø8 x 130 mm	This waterproof, ribbon surface probe incorporates a MPK moulded plug and utilises flat ribbon technology to ensure a fast, accurate response with minimal heat loss. Response time less than 0.5 of a second. Probe temperature range -75 to 250 °C.	123-046	34.50
		323-046 <i>(coiled lead)</i>	35.50
surface probe  Ø6 x 130 mm	This surface probe incorporates a spring-loaded copper disc sensing tip. The probe is ideal for a variety of surface temperature measurements. Response time less than two seconds. Probe temperature range -100 to 600 °C.	123-000	30.50
heavy duty surface probe  Ø12 x 130 mm	This high temperature surface probe is ideal for measuring the temperature of griddles, hotplates etc. Response time less than one second. Probe temperature range -100 to 1000 °C. A right-angled version is also available.	123-020	32.50
		123-028 <i>(right-angled)</i>	41.50
penetration probe  Ø3.3 x 100 mm	This small handled, stainless steel penetration probe is strong and versatile. Ideal for measuring a wide variety of applications including liquids and semi-solids. Response time less than three seconds. Probe temperature range -75 to 250 °C.	123-162	25.00
fast response probe  Ø3.3 x 100 mm	This small handled, fast response, stainless steel penetration probe is ideal for liquids or semi-solids i.e. soft rubber and other similar materials. Response time less than two seconds. Probe temperature range -75 to 250 °C.	123-158	27.00

Please note: for hand held type T thermocouple probes, replace the third digit (3) of the order code with the number 7

Waterproof Temperature Probes





heavy duty type K thermocouple

		order code	£ each
penetration probe  Ø3.3 x 130 mm	This stainless steel, waterproof penetration probe is strong and versatile and incorporates a heavy duty ribbed handle with a colour-coded end cap. Suitable for general purpose applications including liquids and semi-solids. Response time less than three seconds. Probe temperature range -75 to 250 °C.	● 143-162	30.00
		● 143-163	30.00
		● 143-164	30.00
		● 143-165	30.00
		○ 143-166	30.00
		● 143-167	30.00
reduced tip probe  Ø6.35 x 300 mm	This reduced tip, waterproof, stainless steel penetration probe incorporates a heavy duty ribbed handle. The probe is ideal for heavier duty applications including food processing, asphalt and other similar materials. Response time less than ten seconds. Probe temperature range -75 to 250 °C.	143-120	35.00
bell surface probes  Ø19 x 130 mm	These fast response, waterproof surface probes utilise a bell-shaped housing with a thin, flat, stainless steel measuring disc that ensures a fast, accurate response. Ideal for measuring a variety of surface temperatures. Response time less than five seconds. Probe temperature range -75 to 200 °C.	143-080 <i>(straight)</i>	36.00
		143-084 <i>(45° angle)</i>	38.00
		143-086 <i>(90° angle)</i>	38.00

Please note: the above thermocouple probes are supplied with a moulded thermocouple connector. For hand held type T thermocouple probes, replace the third digit (3) of the order code with the number 7

Interchangeable Probe Handle





& plug-mounted type K thermocouple probes

		order code	£ each
interchangeable probe handle  Ø25 x 151 mm	This interchangeable probe handle incorporates a miniature thermocouple socket, to be used in conjunction with our range of plug-mounted probes. Supplied with a one metre coiled PU lead and miniature plug.	323-950	19.00
penetration probe  Ø3.3 x 120 mm	This stainless steel, penetration probe is strong, versatile and ideal for liquids or semi-solids. Response time less than three seconds. Probe temperature range -75 to 250 °C.	133-161	14.00
air or gas probe  Ø3.3 x 120 mm	This probe has a perforated stainless steel tip for fast response. Ideal for chill cabinets, fridges, freezers and HVAC units. Response time less than one second. Probe temperature range -75 to 250 °C.	133-301	13.50
surface probe  Ø8 x 120 mm	This stainless steel, surface probe uses flat ribbon technology ensuring a fast, accurate response with minimal heat loss. Response time less than one second. Probe temperature range -75 to 250 °C. A right-angled version is also available.	133-045	19.00
		133-046 <i>(right-angled)</i>	20.50



Heavy Duty Temperature Probes

type K thermocouple

		order code	£ each
penetration probe  Ø4 x 100 mm	This robust Ø4 mm stainless steel penetration probe incorporates a T-shaped polypropylene handle. The probe is ideal for a variety of heavy duty applications including food processing and other similar industries. Response time less than four seconds. Probe temperature range -75 to 250 °C.	133-124	34.50
reduced tip probe  Ø6.35 x 100 mm	This robust Ø6.35 mm stainless steel, reinforced pointed probe incorporates a T-shaped polypropylene handle and a reduced sensing tip for faster response. Ideal for a variety of heavy duty applications including food processing etc. Response time less than nine seconds. Probe temperature range -75 to 250 °C.	133-126	34.50
reduced tip probe  Ø6.35 x 300 mm	This extended, robust Ø6.35 mm stainless steel, reinforced pointed probe incorporates a T-shaped polypropylene handle and a reduced sensing tip for faster response. Ideal for a variety of heavy duty applications including food processing etc. Response time less than nine seconds. Probe temperature range -75 to 250 °C.	133-120	35.50
reduced tip probe  Ø8 x 500 mm	This Ø8 mm stainless steel, reinforced pointed probe incorporates a T-shaped polypropylene handle and a reduced sensing tip for faster response. Ideal for a variety of heavy duty applications including food processing etc. Response time less than ten seconds. Probe temperature range -75 to 250 °C.	133-130	40.00
reduced tip probe  Ø9.5 x 1000 or 1400 mm	This Ø9.5 mm stainless steel, reinforced pointed probe incorporates a T-shaped polypropylene handle and a reduced sensing tip for faster response. Ideal for applications where a longer probe is required, i.e. grain silos. Response time less than 17 seconds. Probe temperature range -75 to 250 °C.	133-136 (1000 mm)	60.00
		133-135 (1400 mm)	70.00
reduced tip probe  Ø9.5 x 2000 mm	This Ø9.5 mm stainless steel reinforced pointed probe incorporates a T-shaped polypropylene handle and a reduced sensing tip for faster response. Ideal for applications where a very long probe is required, i.e. grain silos. Response time less than 17 seconds. Probe temperature range -75 to 250 °C.	133-133	80.00
corkscrew probe  Ø8 x 100 mm	This stainless steel probe incorporates a heavy duty T-shaped polypropylene handle and a corkscrew design sensing tip. Ideal for industrial and food processing applications. Each probe is supplied with a one metre PVC detachable lead. Response time less than nine seconds. Probe temperature range -75 to 250 °C.	133-175	57.00

Please note: for hand held type T thermocouple probes, replace the third digit (3) of the order code with the number 7



Fast Response Temperature Probes

exposed junction wire type K thermocouple




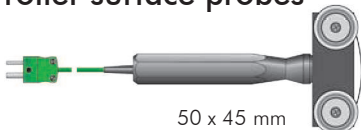




		order code	£ each
PTFE wire probe  Ø1.5 x 1000 or 2000 mm	This PTFE insulated, exposed junction wire probe is suitable for measuring the air temperature in fridges, freezers, ovens etc. Response time less than 0.5 of a second. Probe temperature range -75 to 250 °C.	133-362 (1000 mm)	7.50
		133-363 (2000 mm)	8.50
heavy duty PTFE wire probe  Ø2.4 x 1000 or 2000 mm	This heavy duty, PTFE insulated wire probe is ideal for measuring the air temperature in fridges, freezers etc. Response time less than 0.5 of a second. Probe temperature range -75 to 250 °C.	133-372 (1000 mm)	11.00
		133-373 (2000 mm)	13.00
fibreglass wire probe  Ø1.5 x 1000 or 2000 mm	This fibreglass, exposed junction wire probe is ideal for measuring the air temperature of ovens, hot cupboards and similar appliances. Response time less than 0.5 of a second. Probe temperature range -60 to 350 °C.	133-382 (1000 mm)	8.50
		133-383 (2000 mm)	9.50
NEW high temperature wire probe  Ø3 x 1000 or 2000 mm	This new high temperature, fibreglass wire probe is insulated with a stainless steel braid and is ideal for ovens, hot cupboards and similar appliances. Supplied with a one or two metre stainless steel braided lead. Response time less than 0.5 of a second. Probe temperature range -60 to 600 °C.	133-387 (1000 mm)	14.50
		133-389 (2000 mm)	18.00
attachment pads  12 x 18 mm	These easy to use attachment pads are supplied in packs of 25. The pads are recommended for attaching small diameter wire thermocouples to surfaces. These PTFE pads can be used over the range of -50 to 200 °C.	600-485	4.00
NEW probe extension lead  1000 or 2000 mm	This new probe extension lead enables the user to connect to any ETI thermocouple type K probe, extending reach up to an additional 1000 or 2000 mm. Supplied with a PVC straight lead.	627-732 (1000 mm)	6.00
		627-733 (2000 mm)	7.00
NEW probe extension lead  1000 or 2000 mm	This new probe extension lead enables the user to connect to any ETI thermocouple type K probe, extending reach up to an additional 1000 or 2000 mm. Supplied with a PU coiled lead.	627-740 (1000 mm)	8.00
		627-741 (2000 mm)	9.00
miniature plug  16 x 19 mm	Miniature thermocouple plugs are a must for accurate readings when joining probe cables. The flat pins are manufactured from compatible thermocouple material and can accommodate wires up to Ø0.5 mm.	625-217	2.25
miniature socket  16 x 25 mm	Miniature thermocouple sockets are a must for accurate readings when joining probe cables. The socket incorporates compatible thermocouple material and can accommodate wires up to Ø0.5 mm.	421-501	2.25

Please note: for hand held type T thermocouple wire probes, replace the third digit (3) of the order code with the number 7



Special Temperature Probes

type K thermocouple

		order code	£ each
miniature needle probe  Ø1.4 reducing to Ø1 mm tip x 50 mm	This miniature, stainless steel needle probe is supplied with a one metre PTFE lead. Ideal for measuring small semi-solid items and sous vide cooking. Response time less than one second. Probe temperature range -75 to 250 °C.	133-180	28.50
fast response meat probe  Ø1 mm tip x 90 mm	This fast response, meat penetration probe is specially designed for measuring burger patties etc. Supplied with a one metre coiled lead. Response time less than one second. Probe temperature range -75 to 250 °C.	133-150	27.00
magnet surface probe  Ø24 x 28 mm	This magnet probe is supplied with a 500 mm PTFE lead. Ideal for monitoring the surface temperature of ferrous metals, e.g. radiators or hotplates. Response time less than 20 seconds. Probe temperature range -20 to 80 °C.	133-017	31.50
roller surface probes  50 x 45 mm	These roller surface probes have either s/steel or PTFE wheels and are designed for measuring moving surfaces. Max. speed 100 metres per minute. Response time less than 0.5 of a second. Probe temperature range -75 to 250 °C.	123-038 <i>(s/steel)</i> 123-036 <i>(PTFE)</i>	90.00 80.00
velcro pipe probe  20 x 500 mm	This 500 mm wrap-around velcro pipe probe is suitable for medium and large pipe temperature measurement in the HVAC industry. Supplied with a two metre lead. Response time less than 20 seconds. Probe temperature range -10 to 100 °C.	133-080	24.00
pipe clamp probe  for pipes from Ø6 to Ø30 mm	This robust, pipe clamp temperature probe is suitable for measuring the surface temperature of pipes in refrigeration, heating and ventilating systems etc. Response time less than two seconds. Simple clamp-on design for simplicity of use. Probe temperature range -10 to 100 °C.	133-040	19.00
black ball probe  Ø50 mm	This black ball probe is designed to measure the radiation temperatures in hot cupboards, ovens etc. Supplied with a two metre stainless steel braided lead. Response time less than six seconds. Probe temperature range 0 to 200 °C.	133-475	42.00
adjustable tyre probe  Ø1 x 10 mm	This fast response tyre probe has an adjustable depth stop (1 to 10 mm) which the user can manually set. This probe has been specifically designed for measuring tyre temperatures, supplied with a one metre coiled lead and moulded thermocouple connector. Response time less than 0.5 of a second. Probe temperature range -75 to 250 °C.	343-100	37.00

Please note: for hand held type T thermocouple probes, replace the third digit (3) of the order code with the number 7

