




IEC 61111 INSULATING MATS

Series MP-11-20-42-60-100-120

Class 0 – 2 – 3 - 4

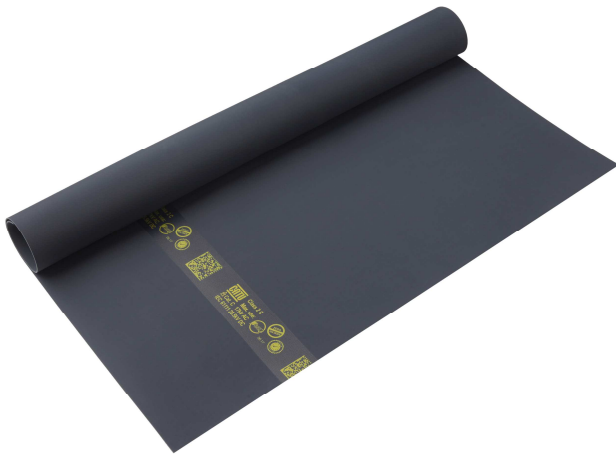

Detail of marking

Protective equipment against electric shock.

Electrical insulating mat for use as a floor covering for the electrical protection of workers on electrical installations.

Standard conformity: **IEC 61111. Live Working.**



TECHNICAL CHARACTERISTICS

- All references are in accordance with **IEC 61111 standard** and to specific properties of the “C” Category (extremely low temperature folding test at – 40 °C).
IEC 61111 standard is the only one international standard concerning insulating mats.
- RoHS2 compliant.
- REACH compliant (SVHC free).
- Zero Halogen.
- 2 D bar code (Datamatrix) on marking with direct link to user guide and technical sheet.
- Insulating mats must be chosen according to the maximum service voltage of the installation.
- High dielectric quality.
- Rubber material with non-slip surfaces on both sides.
- Operating temperature : - 40 to + 55 °C
- Storage temperature : + 10 to + 21 °C
- Repetitive marking (2 markings every 1 m minimum).



<ul style="list-style-type: none"> RoHS2 compliant. Material free of Lead, Mercury, Cadmium, Hexavalent Chromium, Polybrominated biphenyls (PBB), Polybrominated diphenyl ethers (PBDE). 	
<ul style="list-style-type: none"> REACH compliant. Material free of 163 Substances of Very High Concern (SVHC). 	
<ul style="list-style-type: none"> Zero Halogen. Material free of Fluoride, Chlorine, Bromine and Iodine. The absence of halogen is a positive indicator for the safety and health of operators in the event of fire. 	

REFERENCE / DIMENSIONS / WEIGHT / SERVICE VOLTAGE

Reference	IEC 61111	Thickness (mm)	Length x Width (m)	Weight (kg)	Maximum service voltage in kV (1)	
					AC	DC
MP-11/66	Class 0	2,2	0,6 x 0,6	1	1	1,5
MP-11/16			0,6 x 1	1,8		
MP-11/26			0,6 x 1,2	2		
MP-11/11			1 x 1	3		
MP-11/21			1 x 1,2	3,4		
MP-11/22			1,2 x 1,2	4		
MP-60/02-5			0,6 x 5	9		
MP-60/02-10			0,6 x 10	18		
MP-100/02-5			1 x 5	15		
MP-100/02-10			1 x 10	30		
MP-120/02-5			1,2 x 5	17		
MP-120/02-10			1,2 x 10	34		

MP-20/66	Class 2	2,6	0,6 x 0,6	1,5	17	25,5
MP-20/16			0,6 x 1	2,4		
MP-20/26			0,6 x 1,2	2,8		
MP-20/11			1 x 1	3,9		
MP-20/21			1 x 1,2	4,7		
MP-20/22			1,2 x 1,2	5,6		
MP-60/20-5			0,6 x 5	12		
MP-60/20-10			0,6 x 10	24		
MP-100/20-5			1 x 5	19,5		
MP-100/20-10			1 x 10	39		
MP-120/20-5			1,2 x 5	23,5		
MP-120/20-10			1,2 x 10	47		

(1) On multiphase circuits: the nominal voltage is the phase to phase voltage.
On single phase circuit: the nominal voltage is the phase to ground voltage.





IEC 61111 INSULATING MATS

Class 0 – 2 – 3 - 4

Reference	IEC 61111	Thickness (mm)	Length x Width (m)	Weight (kg)	Maximum service voltage in kV (1)	
					AC	DC
MP-42/66	Class 3	3,2	0,6 x 0,6	1,8	26,5	39,75
MP-42/16			0,6 x 1	2,9		
MP-42/26			0,6 x 1,2	3,5		
MP-42/11			1 x 1	4,5		
MP-120/03-1			1 x 1,2	5,4		
MP-120/03-2			1,2 x 1,2	6,5		
MP-60/03-5			0,6 x 5	14		
MP-60/03-10			0,6 x 10	28		
MP-100/03-5			1 x 5	22,5		
MP-100/03-10			1 x 10	45		
MP-120/03-5			1,2 x 5	27		
MP-120/03-10			1,2 x 10	54		

MP-60/05-1	Class 4	5	0,6 x 1	4,5	36	54
MP-120/05-0			0,6 x 1,2	5,4		
MP-100/05-1			1 x 1	8,9		
MP-120/05-1			1 x 1,2	10,5		
MP-120/05-2			1,2 x 1,2	12,6		
MP-60/05-5			0,6 x 5	22		
MP-60/05-10			0,6 x 10	45		
MP-100/05-5			1 x 5	44,5		
MP-100/05-10			1 x 10	89		
MP-120/05-5			1,2 x 5	52,5		
MP-120/05-10			1,2 x 10	105		

(1) On multiphase circuits: the nominal voltage is the phase to phase voltage.
On single phase circuit: the nominal voltage is the phase to ground voltage.

STANDARD REFERENCES

- “Live working. Electrical insulating matting”: EN 61111, IEC 61111 standard, "C" Category.
- RoHS2: Directive 2011/65/EU Annex II.
- REACH: SVHC list based on the publication by European Chemicals Agency (ECHA) on 2015 and Regulation (EC) N° 1907/2006 concerning the REACH.
- Zero Halogen: Tests based on EN 14582 guidelines.



OPTIONAL ACCESSORIES

Carrying bag for individual mats up to 0.7 m width.

Reference: MP-01



Carrying bag for individual mats up to 1.1 m width.

Reference: MP-02

Strap "Velcro" type for maintaining the mat in rolled position.

Reference: MO-160



Shoulder strap for maintaining and carrying the mat in rolled position.

Reference: MO-161

