



**Accessory Range
for Pipe & Cable Location Equipment**

GENERAL PURPOSE SONDE

The C.SCOPE 8kHz and 33kHz General Purpose Sondes are transmitters used to trace the direction of pipes.


C.SCOPE 8kHz and 33kHz General Purpose Sondes allow the route of non-metallic pipes such as sewers, drains and large plastic gas and water mains to be traced. Ideal for finding the position of blockages in pipes and powerful enough to be detectable at 7 metres (23 foot) depth dependent on type of C.SCOPE Locator used and site conditions.



General Purpose Sonde SPECIFICATION

| | |
|------------------------|--|
| Product Name | General Purpose Sondes |
| Part Numbers | YIRS-33 and YIRS-8 |
| Frequency | Transmits 32,768Hz and 8,192Hz respectively |
| Construction | Rugged plastic casing, stainless steel stud. Epoxy resin filled |
| Colour | Orange casing for 33kHz. Green casing for 8kHz |
| Detection Depth Range: | |
| for 33kHz Sonde | Up to 7 m (23 foot) dependent on type of C.SCOPE Locator and site conditions |
| for 8kHz Sonde | Up to 7 m (23 foot) dependent on type of C.SCOPE Locator and site conditions |
| Dimensions | 39mm diameter x 121 mm long (1.5" x 4.7") |
| End fitting | M10 threaded stud |
| | Supplied with Rod Connector to fit standard drain rods with 7 T.P.I. thread |
| Battery Type | 1 x AA, LR6 Alkaline |
| Battery Life | Up to 15 hours |
| Approvals | EN301 489 EN300 330 |
| IP Rating | 68 |

Specification subject to change without notice.

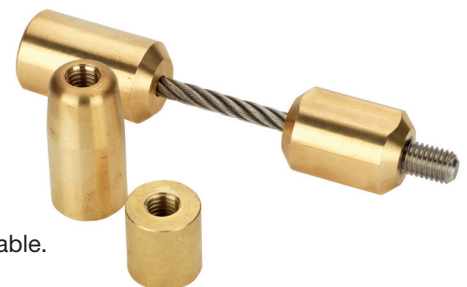

The Spring Coupling is an accessory for use with Sondes to help negotiate bends and obstructions in pipe systems. A Lockfast Rod Connector is also available.

DUCT SONDE

The C.SCOPE 33kHz Duct Sonde is a transmitter designed specifically to trace the route of congested ducts or conduits.

Often a standard sized Sonde is too large to pass between cables when tracing electrical, telecommunication or cable conduits or ducts. The solution is the C.SCOPE 33kHz Duct Sonde.

The C.SCOPE 33kHz Duct Sonde is a small diameter battery powered transmitter which can be screwed onto the end of a duct rod and inserted into a duct or conduit. This allows the route of the duct or conduit to be traced using a C.SCOPE Locator. The exact point of a blockage can be identified using this system with enormous cost saving potential.

Developed in conjunction with British Telecom, the smaller diameter of the Duct Sonde can be easily pushed along the duct without snagging.



Duct Sonde SPECIFICATION

| | |
|-----------------------|---|
| Product Name | Duct Sonde 33kHz |
| Part No. | YIRSD-33 |
| Construction | Waterproof, robust plastic, O Ring battery compartment seal, stainless steel end fittings |
| Frequency | Transmits 32,768Hz continuous |
| Detection Depth Range | 4.5m (15 foot) dependent on type of C.SCOPE Locator and site conditions |
| Dimensions | 24mm diameter x 200mm length (1" x 7.8") |
| End fitting | Standard rod thread (" Whitworth 16 T.P.I.), female connector at one end |
| Battery Type | 1 x AAA (IEC type LR03) Alkaline |
| Battery Life | Up to 20 hours intermittent use at 20°C (68°F) |
| IP Rating | 68 |

Specification subject to change without notice.

METAL PIPE SONDE

The C.SCOPE Metal Pipe Sonde is a small, self-contained low frequency transmitter that can be used inside metallic pipes.

To address the problems of detecting the position of a blockage or other relevant feature within a metal pipe, the C.SCOPE Metal Pipe Sonde is specially designed with a low frequency signal output that is capable of being transmitted through the metal pipe walls to the surface.


This makes it ideal for finding the position of blockages in metal pipes or for use with a camera and is powerful enough to be detectable at up to 5 metres depth with the C.SCOPE MXL2/MXL4 Precision Pipe and Cable Locator (dependent on pipe material and wall thickness).



Metal Pipe Sonde SPECIFICATION

| | |
|-----------------------|---|
| Product Name | Metal Pipe Sonde |
| Part Numbers | YIRS-512 and YIRS-640 |
| Frequency | Transmits 512Hz and 640Hz respectively |
| Detection Depth Range | Up to 5metres (16'5") dependent on pipe material and wall thickness |
| Dimensions | 39mm diameter x 121 mm length (1.5" x 4.7") |
| End fitting | M10 threaded stud supplied with 7 t.p.i. rod fitting (other adaptors are available) |
| Battery Type | 1 x AA (IEC type LR6) |
| Battery Life | Up to 25 hours intermittent use at 20°C (68°F) |
| Approvals | EN301489 EN300 330 EAN 5060086350791 |
| IP Rating: | 68 |

Specification subject to change without notice.

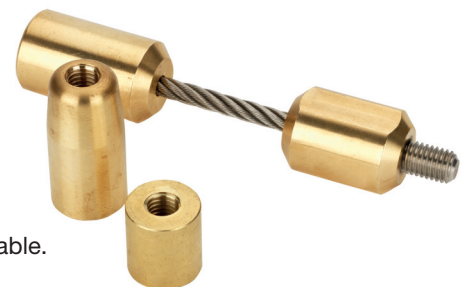

The Spring Coupling is an accessory for use with Sondes to help negotiate bends and obstructions in pipe systems. A Lockfast Rod Connector is also available.

PLASTIC PIPE TRACERS

The Plastic Pipe Tracers allow small diameter, non-metallic pipes to be traced.

Developed as a result of requests from the British gas industry the C.Scope Plastic Pipe Tracers are the smallest diameter product on the market and can be successfully inserted into pipes when nothing else fits. Their unique construction gives unparalleled reliability and yet allows both line tracing and the all important end tracing using the remarkable Sonde technology housed at the very tip of the Tracers.

Available in 20 or 50 metre lengths (65 and 160 foot).



Plastic Pipe Tracer SPECIFICATION

| | | |
|--|---|--|
| Product Name | 20m and 50m Plastic Pipe Tracer (65' and 160') | |
| Part No. | YIRPPT20-33 and YIRPPT50-33 | |
| Frequency | Operates at 32,768Hz | |
| Detection Depth Range: | | |
| Line Detection | 3m (10 foot) dependent upon Locator and Signal Generator type and site conditions | |
| Tip Detection | 4m (13 foot) dependent upon Locator and Signal Generator type and site conditions | |
| Compatibility | Any Signal Generator or Transmitter with 33kHz or 33/131kHz combined output | |
| Rod Length | 20m or 50m (65' and 160') | |
| Rod and Sonde Diameter | 6mm (0.2") | |
| Rod Minimum Bend Radius | 50mm (1.9") | |
| Construction: | | |
| Reel | Robust plastic housing | |
| Rod | Flexible, chemical resistant plastic | |
| Reel dimensions (20m) | 150 x 120 x 250mm (5.9" x 4.7" x 9.8") | |
| Reel dimensions (50m) | 165 x 290 x 240mm (6.5" x 11.4" x 9.4") | |
| Reel weight (20m) | 1248g (2 pound 12 ounces) | |
| Reel weight (50m) | 2073g (4 pound 8.5 ounces) | |
| Operational Temperature Range | -20°C to 50°C (-4°F to 122°F) | |
| Storage Temperature Range | -20°C to 50°C (-4°F to 122°F) | |
| IP rating for actual Tracer Rod & Tip | 68 | |
| IP rating for Plastic Pipe Tracer Casing | 54 | |


Specification subject to change without notice.

FLEXIBLE TRACER

The Flexible Tracer is highly effective at locating and tracing the route of small diameter, non-metallic ducts, pipes, sewers and drains.

When used with any C.Scope Cable Locator and Signal Generator, both the route of a non-metallic pipe and a particular end point can be pinpointed with the Flexible Tracer. This is particularly useful for identifying the position of any blockages or obstructions within the pipe. If a depth measuring Locator is being used then it is also possible to know the depth of the pipe/blockage.

The Flexible Tracer comprises a continuous fibreglass rod housed in a reel that rotates on an axle. The axle has a slip-ring allowing the Signal Generator to remain connected to the connection terminals of the Flexible Tracer whilst it is being inserted into the pipe to be traced. A tiny Sonde is built into the tip of the Flexible Tracer allowing the end point of the Tracer to also be located. This Sonde is also flexible.

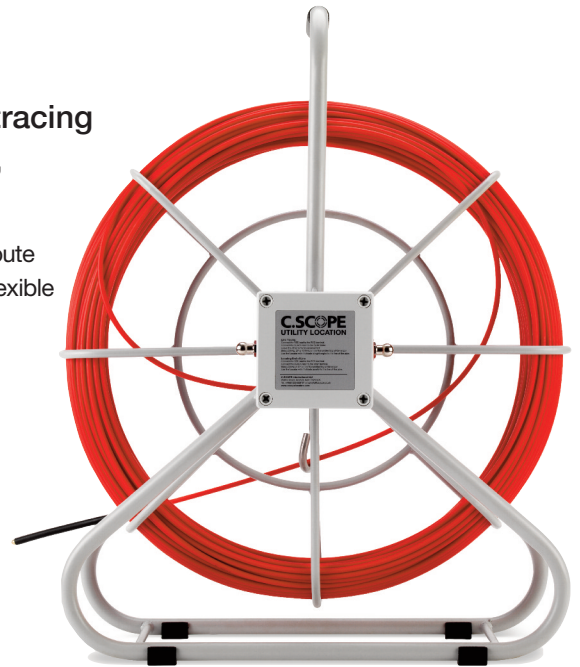

Flexible Tracer SPECIFICATION

| | | |
|--------------------------------|---|--|
| Product Name | 80 m Flexible Tracer (260') | |
| Part No. | YIRRFT-80 | |
| Frequency | Optimised for 32,768Hz | |
| Detection Depth Range: | | |
| Line Detection | 3m (10 foot) dependent upon Locator and Signal Generator type and site conditions | |
| Tip Detection | 4m (13 foot) dependent upon Locator and Signal Generator type and site conditions | |
| Compatibility | Any Signal Generator or Transmitter with 33kHz or 33/131kHz combined output | |
| Rod Length | 80 m (260') | |
| Rod Diameter | 5 mm nominal (0.2") | |
| Rod Material | Quality sleeved fibreglass rod with three integral copper wires | |
| Rod Minimum Bend Radius | 10 cm (3.9") reducing to 15 cm (5.9"), 5 cm (1.9") from Tip | |
| Rod wire diameter | 0.45 mm each wire (0.018") | |
| Transmitting Sonde Diameter | 7.5 mm max. (0.3") | |
| Rigid Tip Length | 20 mm max. (0.8") | |
| Tip Material | Brass | |
| Frame Size | 58.8 x 28.8 x 48.5 cm (1'11" x 11.3" x 1'7") | |
| Frame Material | Powder coated 16 mm steel tube (0.6") | |
| Reel Diameter | 48 cm (1'7") | |
| Weight | 7.5 kg (16 pound 8.5 ounces) | |
| Slip ring assembly | Sealed multi-wire duplexed | |
| Operational Temperature Range | -20°C to 50°C (-4°F to 122°F) | |
| Storage Temperature Range | -20°C to 50°C (-4°F to 122°F) | |
| IP rating for Tracer Rod & Tip | 68 | |
| IP rating for Casing | 54 | |
| IP rating for Terminal Box | 66 | |

Specification subject to change without notice.

SIGNAL CLAMP

The Signal Clamp provides a safe and straightforward way to apply the Generator/ Transmitter signal to a cable or small pipe to enable precision tracing of this service.

The C.SCOPE Signal Clamp allows operators to apply the Generator/ Transmitter signal from any C.SCOPE Signal Generator or Transmitter effectively to any cable. It is an extremely practical way to allow individual cables to be traced even when the cable is in amongst other cables.



Signal Clamp SPECIFICATION

| | |
|---------------|--|
| Product Name | Signal Clamp |
| Part No. | YIRC-33-8 |
| Construction | Toroidal induction ring housed in robust plastic Spring loaded jaws |
| Frequency | Tuned for optimum use with 33kHz Signal Generators/ Transmitters |
| Dimensions | 270 x 160 x 28 mm (10.6" x 6.3" x 1.1") |
| Lead length | 2 m (6'6.7") |
| Compatibility | Maximum cable diameter 105 mm (4.1") Suitable for use with all C.Scope Signal Generators and Transmitters |
| Safety | Built to conform to BSEN61010-1:1993 and BSEN 61010-2-032:1995 |
| IP Rating | 54 |

Specification subject to change without notice.

SIGNAL INJECTOR

The Signal Injector is an accessory that allows the Signal Generator signal to be safely applied to an electrical system via a conventional 3-pin power socket.

The C.SCOPE Signal Injector is an accessory which, when connected to a C.SCOPE Signal Generator or Transmitter, applies a signal safely to an electrical system via a conventional 3-pin power socket. This signal will then be detectable on the buried supply cable outside of the building and many supply cables within the property.

The transmitted signal can then be detected by any C.SCOPE Locator.



Signal Injector SPECIFICATION

| | | |
|--|--|--|
| Product Name | Signal Injector | |
| Part No. | YIRIP-33-E | |
| Dimensions: | | |
| Box | 100 x 50 x 25mm (3.9" x 1.9" x 1") | |
| Input Lead Length | 1 m (3'3.3") | |
| Output Lead Length | 1.5m (4'11") | |
| Construction | Encapsulated, robust housing Moisture / dust resistant to IP54 | |
| Electrical Output (Mains side): | | |
| Electrical Isolation | Class II (Double Insulated) | |
| Mains Plug Connector | UK, 3 pin to BS1363, load between Live and Earth or 2 pin European Shuko style | |
| Maximum Voltage | 250 V rms | |
| Maximum Load | <10mA (predominantly capacitive) | |
| Frequency range | 45-65Hz | |
| Electrical Input (Signal Generator/ Transmitter side): | | |
| Connector | 3 pin XLR male (industry standard) | |
| Maximum Voltage | 42 V rms | |
| Maximum Power | <250mW when driven from C.SCOPE Signal Generator/ Transmitter | |
| Input Impedance | 2000 Ohms | |
| Frequency | 32,768Hz | |
| Safety | Built to conform to BSEN61010-1:1993 and BSEN 61010-2-032:1995 | |

Specification subject to change without notice.

CS880 Metal Cover Locator

The CS880 Metal Cover Locator detects lost or hidden metal objects such as manhole covers and stopcock covers.

The CS880 Metal Cover Locator is a purpose-built solution to the problem of finding lost or hidden metal objects in the ground.

It is most commonly used for locating manhole covers buried under tarmac or grass.

It can be used to successfully find stopcock covers, valve box lids, hydrant and manhole covers.

The CS880 has been designed specifically for the exacting requirements of the water industry and the ground working contractor. It is incredibly simple to operate providing a reliable, neat and quick solution to the problem of pinpointing the position of metal covers buried under earth or tarmac.



CS880 Metal Cover Locator SPECIFICATION

| | |
|-----------------------|--|
| Product Name | CS880 Metal Cover Locator |
| Part No. | CS880 |
| Controls | Simple on / off push buttons |
| Construction | 100% submersible highly robust search coil |
| Detection range: | |
| Stopcock | 25cm (9.8") |
| Valve cover | 50cm (1'7.6") |
| Cable pit cover | 90cm (2'11.4") |
| Manhole cover | 90cm (2'11.4") |
| Design | Twistlock stem length adjustment Comfortable hand grip with arm rest Fascia mounted loudspeaker with socket for optional headphones Sealed separate battery compartment Protective carry bag available |
| Battery Type | 8 x AA (LR6) Alkaline clip in battery pack. Compatible with NiMH rechargeable batteries. |
| Battery Life | Greater than 100 hours (typical usage) |
| Search Head IP Rating | 67 |

Specification subject to change without notice.

Carry Bags

C.SCOPE produce a range of carry bags to transport and store Pipe and Cable Locator equipment and accessories.

A C.Scope Carry Bag will keep your C.Scope Pipe & Cable Locator Equipment & Accessories safe when not in use and will still have capacity to carry the additional locating accessories such as site maps, marker paint or pegs to site each time. Choose between the Professional Carry Bag that has specific compartments for each item or the Budget Carry Bag that is a loose holdall type of construction.



SPECIFICATIONS

| | |
|--------------|---|
| Product Name | CS880 Carry Bag |
| Part No. | YCBM |
| Dimensions | 30 x 16 x 85 cm (11.8" x 6.3" x 2'9.5") |
| Capacity | 38litres |
| Product Name | Large Carry Bag |
| Part No. | YCBL |
| Dimensions | 33 x 25 x 89 cm (1'1" x 9.8" x 2'11") |
| Capacity | 72litres |
| Product Name | Professional Carry Bag |
| Part No. | YCB/CS |
| Dimensions | 22 x 23 x 76 cm (8.6" x 9" x 2'6") |
| Capacity | 38litres |

Specification subject to change without notice.

General Purpose Sonde 8kHz

General Purpose Sonde 33kHz

Duct Sonde

Metal Pipe Sonde

Spring Coupling & Rod Connectors

Plastic Pipe Tracer 20m

Plastic Pipe Tracer 50m

Flexible Pipe Tracer

Signal Clamp

Signal Injector

CS880 Metal Cover Locator

Carry Bags

C.SCOPE International Ltd

Kingsnorth Technology Park Wotton Road Ashford Kent TN23 6LN United Kingdom
Telephone +44(0)1233 629181 Fax +44(0)1233 645897 email info@cscope.co.uk

www.cscopelocators.com

All C.SCOPE products are manufactured under a quality system accredited to ISO9001:2008



The information in this leaflet is believed to be correct at time of going to press. C.SCOPE International reserve the right to change prices at any time without prior notice.