


## Battery Capacity Tester

**✓ AC milliohmmeter checks Battery Condition in seconds**  
*While the battery is in service*

### Features:

- On-line testing without disconnecting battery
- Built-in datalogger manually stores up to 999 sets and 9600 sets for continuous datalogging
- Simultaneously measures DC Voltage and AC Milliohms
- Auto power off
- Includes Windows<sup>®</sup> 95/98/NT/2000/ME/XP compatible software for downloading readings to a PC

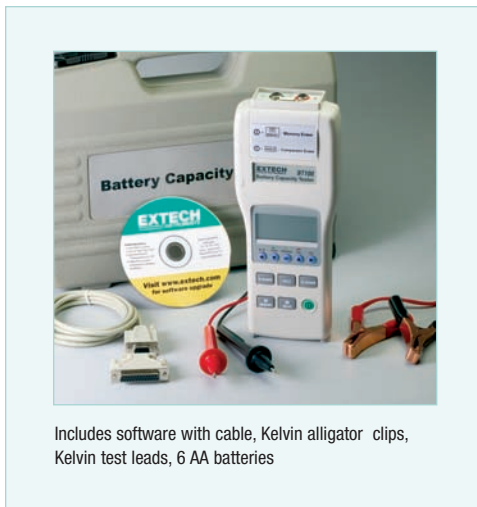

Specifications	Range	Resolution	Basic Accuracy
Resistance	40mΩ, 400mΩ	10μΩ, 100μΩ	±(1% reading ± 10d)
	4Ω, 40Ω	1mΩ, 10mΩ	
Voltage	4V, 40V	1mV, 10mV	±(0.1% reading ± 6d)
Max Input Voltage	50VDC		
Manual Datalogging	999 sets		
Continuous Datalogging	9600 sets		
Power	6 AA batteries		
Battery life	7 hours		
Dimensions	9.75 x 4 x 1.75" (250 x 100 x 45 mm)		
Weight	17.5oz (500g)		

### Ordering Information:

- BT100 .....Battery Capacity Tester  
 BT102 .....120V AC Adaptor  
 BT100-AL ....Replacement Alligator Clips for BT100  
 BT100-TL ....Replacement Test Leads for BT100  
 USB100 .....RS-232 to USB Adaptor

