

## TruCheck 2 Plus, 0.5 - 10 N·m



TruCheck™ 2 is a cost effective torque wrench checker that has been redesigned to incorporate improved features whilst maintaining ease of use.

The TruCheck™ 2 aims to cut the cost of purchasing a torque wrench checking system and remove the reservations over the complexity of using such equipment.


**Part number:** 43517

**EAN Bar Code:** 5060207566650

**NATO number:** -

**Accuracy:** -

**Operates between:**  
0.50 - 10.00 N·m

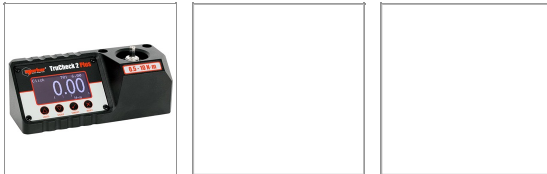

## TECHNICAL SPECIFICATIONS

- Weight: 1.4 kg
- Accuracy:  $\pm 1\%$  torque reading accuracy ( $\pm 2\%$  when below 10% of range for the 1,100 N·m TruCheck™ 2 model)
- Display: LCD Display
- Temp Range - Operating:  $0^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$
- Temp Range - Storage:  $-20^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$
- Auto Reset Hold Time: 1,2 or 3 seconds
- Power Consumption: 0.5W
- Environment: IP 40
- Electromagnetic Compatibility (EMC) Directive: Designed to comply with EN 61326-1
- Requires two Hexagon Socket Head Cap Screws ISO 4762 - M10 - 12.9 to fix in position (not included)

## FEATURES

- Allows torque tool performance to be monitored and tools kept in peak condition.
- Allows a selection of torque units, three modes of operation (Click, Dial and Track), the ability to store up to 15 targets and select from 12 languages
- Allows operator to set a target value and tolerance
- Inbuilt Micro USB 2.0 port enables power from any USB power source. Plus versions allows for both power and data transfer simultaneously
- Supplied with a 1/4" male hexagon and 1/4" female square drive adapter
- If you order a UKAS accredited calibration certificate (available at extra cost) this certificate will be provided in place of the traceable calibration certificate